

Remarks: See §6.3.1, page 219 till 223 and example 4 on page 226


Replace the distributed load by its resultant on the part where the equilibrium is taken in consideration.

After calculating the support reactions the interaction forces in C follow from the equilibrium of one of the parts.

Between rigidly connected parts you've three interaction forces:

- A force in line with the beam. From the horizontal equilibrium it follows that this force is always zero here.
- A force perpendicular to the beam, called V_C here.
- A moment, called M_C here.

The positive directions for V_C and M_C

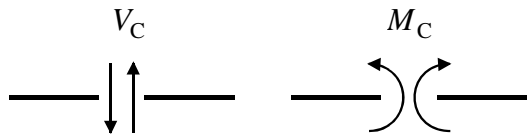

Answers:

- 1a. $A_h = 0$; $A_v = 2 \text{ kN } (\uparrow)$
 1b. $B_v = 6 \text{ kN } (\uparrow)$
 1c. $V_C = -2 \text{ kN}$; $M_C = +4 \text{ kNm}$
- 2a. $A_h = 0$; $A_v = 9 \text{ kN } (\uparrow)$
 2b. $B_v = 7 \text{ kN } (\uparrow)$
 2c. $V_C = +4 \text{ kN}$; $M_C = +6,5 \text{ kNm}$
- 3a. $A_h = 0$; $A_v = 18 \text{ kN } (\uparrow)$
 3b. $B_v = 6 \text{ kN } (\downarrow)$
 3c. $V_C = -6 \text{ kN}$; $M_C = -3 \text{ kNm}$
- 4a. $A_h = 0$; $A_v = 8 \text{ kN } (\uparrow)$
 4b. $B_v = 2 \text{ kN } (\uparrow)$
 4c. $V_C = +2 \text{ kN}$; $M_C = 0$