

Remarks: See §6.3.1, page 219 till 223 and example 2 and 4 on page 223 and 226


Replace the distributed load by its resultant on the part where the equilibrium is taken in consideration.

After calculating the support reactions the interaction forces in C follow from the equilibrium of one of the parts.

Between rigidly connected parts you've three interaction forces:

- A force in line with the beam. From the horizontal equilibrium it follows that this force is always zero here.
- A force perpendicular to the beam, called V_C here.
- A moment, called M_C here.

The positive directions for V_C and M_C

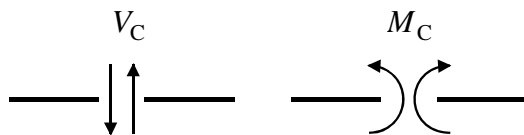

Answers:

In all cases $R = 10,8 \text{ kN}$ (\downarrow) with the line of action 8 m from A.

- | | |
|-----|---|
| 1a. | $A_h = 0$; $A_v = 3,6 \text{ kN}$ (\uparrow) |
| 1b. | $B_v = 7,2 \text{ kN}$ (\uparrow) |
| 1c. | $V_C = +0,9 \text{ kN}$; $M_C = +16,2 \text{ kNm}$ |
| 2a. | $A_h = 0$; $A_v = 5,4 \text{ kN}$ (\uparrow) |
| 2b. | $B_v = 5,4 \text{ kN}$ (\uparrow) |
| 2c. | $V_C = +2,7 \text{ kN}$; $M_C = +2,7 \text{ kNm}$ |
| 3a. | $A_h = A_v = 0$ |
| 3b. | $B_v = 10,8 \text{ kN}$ (\uparrow) |
| 3c. | $V_C = -1,2 \text{ kN}$; $M_C = -1,6 \text{ kNm}$ |